

Slab.

44mm wide Door slabs are stocked in varying widths, which can be sized to survey size. Subframe is oversized to ensure a strong door. This enables faster delivery times and consistent finishes. 10 years manufacturers warranty on the slab.

Subframe of Door Slab.

Made from plastic composite water resistant materials which are engineered to completely seal the insulating core. Some competitors rely on plastic or aluminium trims glued to the edge of the slab to keep moisture away from timber subframes.

Door Skins.

High impact resistant GRP (Glass Reinforced Polyester) pre pigmented skins are compression moulded to give a high definition panel design which is indistinguishable from timber. The thermosetting manufacturing process means they are unaffected by variations in temperature. Doors will not bow, warp, crack, splinter or dent.

Core.


The insulating core consists of 100% CFC-free polyurethane which provides superior thermal performance and enhances the doors sound proofing properties.

Slab Edge.

The slab edges require no extra treatment or finishes to protect the subframe or give a finished edge, although we do use Aluminium powder coated 44mm extrusions to hinge and lock edges which provide a superior finish and consistent positioning of locks and hinges. Some competitors must seal edges with plastic or aluminium extrusions to protect exposed timber subframe.

Glazing.

Snap fit glazing cassettes (no screw ports visible), glazed with double sided tape. External cassette is bonded to skin of slab for PAS24 security. Cassettes are a perfect match to the skin colour.

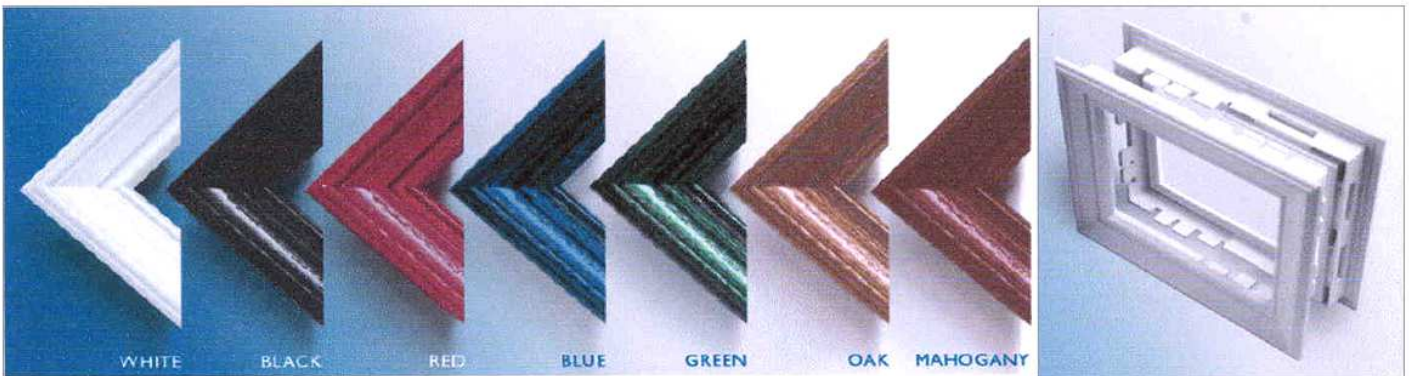

Locks.

Paddock Lockmaster, 2 Hooks, Centre Dead Lock and Latch with 44mm Aluminium face plate.

Many other options available if required.

Lockmaster Multi-Point Locks

Paddock's flagship product range and Europe's premier range of multi-point locks.

Lockmaster boasts a whole host of features and patented innovations to ensure its compliance with the very latest standards and legislation.



Outer Frame.

Choices of 60mm Chamfered frame, 70mm Chamfered frame or 70mm Ovolo decorative frame. Steel reinforced. Q-Lon and Woopile seal.

deceuninck®

REHAU®